


T: 800-253-6300 F: 201-337-6540

www.mulhernbelting.com sales@mulhernbelting.com



GRAY STICKY TOP

Part Number 3-1600

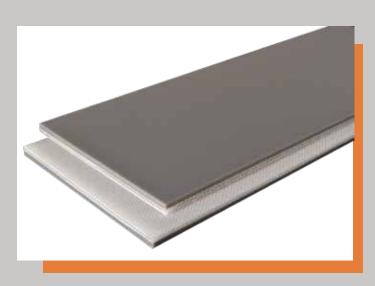

Color: Gray

Nominal OAG: 0.145" +/- .030

Plies: 2

Fabric: Monofilament

Minimum Pulley Diameter: 2"
Top Surface: Low Durometer PVC

Bottom Surface: Bare

Compound: PVC

Work Tension: 100 lbs. PIW Elongation: Less than 2% Weight P.I.W. / Ft.: .072

Working Temperature: 20F to 180F Joining Method: Finger Splice; Lacing

Mulhern Belting's **3-1600** Gray Sticky Top features a 2 ply monofilament carcass and a low durometer adhesive carrying surface. The carcass will permit the belt to travel at high speeds with low noise. Gray Sticky Top is most commonly used in package handling, manufacturing, and post office applications.









WE SUPPLY

- Service
- In-House Fabrication
- Multiple Stocking Locations
- On-Time Delivery
- Quality





Lacing

The complete Flexco line of products: Standard Lacing; Recessed Lacing; Hidden Lacing; Cover Flap Lacing; Plastic Rivet Lacing; Plastic Spiral Lacing



Hot-Molded Rubber Profiles

Sidewall; Tee Cleats; SI Cleats; Scoop Cleats; Lugs; V-Guides; Flanges; Chevron Patterns; Bucket Patterns; Versa Patterns



Endless

Complete Thermoplastic and Rubber Vulcanization: Lap Splices; Finger Splices; Double Finger Splices; Skived Splices; Stitched Reinforcement; Prepared Ends



Specialty Fabrications

Longitudinal Splicing; Covered Timing Belts and V-Belts; APC Belts; Capped Edges; Pulley Lagging; Loop Belts; Teflon Fiberglass Mesh Belts; Grooved and Beveled Belts; Splice Kits



Thermoplastic Profiles

Tee Cleats; Beefy Cleats; Scoop Cleats; Thin Line Cleats; Fabric Reinforced Cleats; Curved Cleat Patterns; Chevron Cleat Patterns; V-Guides; Flanges; Lugs; Sidewall with and without a base



Hole Punching

Punching for Bucket Elevators or Perforations

CONTACT US FOR A QUOTE TODAY! WWW.MULHERNBELTING.COM

PHONE: 1-800-253-6300 FAX: 1-201-337-6540 SALES@MULHERNBELTING.COM